



(11) EP 1 195 761 A2

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
10.04.2002 Bulletin 2002/15

(51) Int Cl.7: G11B 20/00

(21) Application number: 01307452.1

(22) Date of filing: 31.08.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Saliahov, Oleg  
Moscow (RU)


(74) Representative: Gold, Tibor Z. et al  
Kilburn & Strode  
20 Red Lion Street  
London WC1R 4PJ (GB)

(30) Priority: 01.09.2000 CA 2318310

(71) Applicant: Saliahov, Oleg  
Moscow (RU)

(54) **Optical disc authentication method and apparatus**

(57) The present invention relates to an optical disc authentication method and apparatus. The method, wherein each disc has a plurality of ways and a plurality of sectors in each way, includes the steps of measuring the quantity of sectors in each of a defined quantity of ways to provide a disc fingerprint comprising way sector quantity values for an original disc and a target disc and authenticating the target disc. The step of authenticating the target disc includes the steps of comparing the target disc fingerprint to the original disc fingerprint to determine a percentage of coinciding way sector quantity values and classifying the target disc according to whether its determined percentage value is above or below a pre-defined percentage threshold value, wherein a target disc having a determined percentage value of greater than or equal to the threshold value is classified as an original disc, and a target disc having a determined percentage value of less than the threshold value is classified as an illegally copied disc.

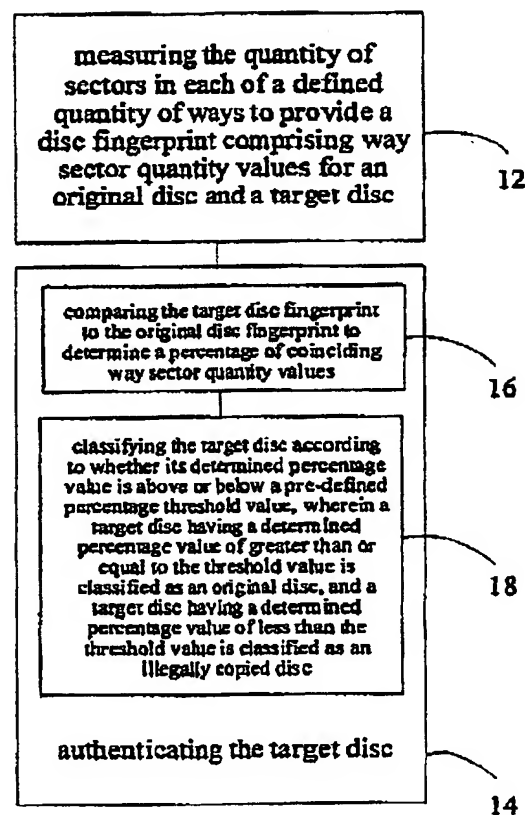

BEST AVAILABLE COPY

Figure 1a

EP 1 195 761 A2

## Description

[0001] A portion of the disclosure of this patent document contains material, which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent files or records, but otherwise reserves all copyrights whatsoever.

## Field of the Invention

[0002] The present Invention relates to digital storage devices, and more particularly to optical disc authentication.

## Background of the Invention

[0003] The popularity of the optical storage disc has risen dramatically since its introduction in the early 1980's. Optical discs, typically referred to as "CDs" (compact disc), "CD-ROMs" (compact disc read-only memory) and more recently "DVDs" (digital versatile disc), have increasingly enjoyed wide acceptance within several industries. Manufacturers have been quick to adopt the format, regularly employing optical discs in the distribution of products such as music and computer software due to their ability to provide virtually error-free duplication.

[0004] However, in large part because of these very advantages, companies are increasingly faced with the illegal copying and distribution of copyrighted material. The problem has only been exacerbated by an enormous increase in the accessibility of duplicating equipment due to recent technical advances that have lowered their cost.

[0005] In an effort to discourage illegal copying, methods have been attempted to differentiate an original disc from an illegally copied one. The most common technique for optical disc authentication has been to write distinguishing marks on the disc along with the product data. These distinguishing marks are made to be difficult to correctly copy onto a disc, or include information relating to a physical location on the disc.

[0006] Another technique is to embed an identifier in the appended parity bytes that are used for detecting and correcting errors in data frames. Still another technique provides a unique serial number that software can verify with a password contained within the product data.

[0007] However, these methods have typically required laborious additional steps within the mastering process, and lack a format-insensitive solution.

[0008] For the foregoing reasons, there is a need for an improved method of optical disc authentication.

## Summary of the Invention

[0009] The present invention is directed to an optical disc authentication method and apparatus. The method, wherein each disc has a plurality of ways and a plurality of sectors in each way, includes the steps of measuring the quantity of sectors in each of a defined quantity of ways to provide a disc fingerprint comprising way sector quantity values for an original disc and a target disc and authenticating the target disc.

[0010] The step of authenticating the target disc includes the steps of comparing the target disc fingerprint to the original disc fingerprint to determine a percentage of coinciding way sector quantity values and classifying the target disc according to whether its determined percentage value is above or below a pre-defined percentage threshold value, wherein a target disc having a determined percentage value of greater than or equal to the threshold value is classified as an original disc, and a target disc having a determined percentage value of less than the threshold value is classified as an illegally copied disc.

[0011] In an aspect of the present invention, the measuring step includes the steps of determining optical disc drive characteristics, collecting sector reading time data and processing the collected data to provide way sector quantity values.

[0012] In an aspect of the present invention, the optical disc drive characteristics are determined by determining cache buffer memory size of the disc drive and determining reading speed reduction parameters of the disc drive.

[0013] In an aspect of the present invention, the sector reading time data is collected by filling the cache buffer with blank data and collecting reading time data in a reading time array from a defined quantity and location of ways on a disc.

[0014] In an aspect of the present invention, the collected data is processed by filtering the data to compensate for reading errors, determining a common slope from the filtered data and identifying slopes matching the determined common slope to ascertain individual ways for the measurement of way sector quantity values.

[0015] Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

Brief Description of the Drawings

[0016] These and other features, aspects, and advantages of the present invention will become better understood with regard to the following description, appended claims, and accompanying drawings where:

Figure 1a is an overview of an optical disc authentication method according to the present invention;  
 Figures 1b-1e show embodiments of the optical disc authentication method according to the present invention;  
 Figures 2a and 2b show a flowchart of an optical disc authentication method according to the present invention;  
 Figure 3 shows a reading time array;  
 Figure 4 is a representation of a top view of an optical disc showing a sector reading sequence;  
 Figure 5 is a graph of raw sector reading time data;  
 Figure 6 is a graph of filtered sector reading time data; and  
 Figure 7 shows a sector quantity array.

Detailed Description of the Presently Preferred Embodiment

[0017] The present invention is directed to an optical disc authentication method and apparatus. As shown in Figure 1a, the method, wherein each disc has a plurality of ways and a plurality of sectors in each way, includes the steps of measuring the quantity of sectors in each of a defined quantity of ways to provide a disc fingerprint comprising way sector quantity values for an original disc and a target disc 12 and authenticating the target disc 14.

[0018] The step of authenticating the target disc 14 includes the steps of comparing the target disc fingerprint to the original disc fingerprint to determine a percentage of coinciding way sector quantity values 16 and classifying the target disc according to whether its determined percentage value is above or below a pre-defined percentage threshold value, wherein a target disc having a determined percentage value of greater than or equal to the threshold value is classified as an original disc, and a target disc having a determined percentage value of less than the threshold value is classified as an illegally copied disc 18.

[0019] As shown in Figure 1b, in an embodiment of the present invention, the measuring step 12 includes the steps of determining optical disc drive characteristics 20, collecting sector reading time data 22 and processing the collected data to provide way sector quantity values 24.

[0020] As shown in Figure 1c, in an embodiment of the present invention, the optical disc drive characteristics are determined by determining cache buffer memory size of the disc drive 26 and determining reading speed reduction parameters of the disc drive 28.

[0021] As shown in Figure 1d, in an embodiment of the present invention, the sector reading time data is collected by filling the cache buffer with blank data 30 and collecting reading time data in a reading time array from a defined quantity and location of ways on a disc 32.

[0022] As shown in Figure 1e, in an embodiment of the present invention, the collected data is processed by filtering the data to compensate for reading errors 34, determining a common slope from the filtered data 36 and identifying slopes matching the determined common slope to ascertain individual ways for the measurement of way sector quantity values 38.

[0023] Data is recorded on an optical disc in a process called "mastering". The first stage in the mastering process involves the recording of product data onto an original disc known in the industry as a "gold master". The data is recorded on the disc in the form of a spiral path called a "trace" that starts from the inside edge of the disc and winds its way towards the outer edge and is made up of sectors containing "pits" representing "is" and "hills" representing "0s".

[0024] A specialized decoding machine copies the data from the gold master to a "master" disc. The master disc is then electrochemically plated with a thick layer of metal that, when separated from the master, provides a negative of the master known as a "stamper". Stampers are then used for disc duplication.

[0025] Disc duplicates have geometric structures that are virtually identical to the geometric structures of their respective masters. However, duplicates created from different masters differ due to sector writing deviations on the masters. These deviations are created by factors such as noise, loss of accuracy in laser placement control or change in disc rotation speed directly affecting the division of data into sectors.

[0026] These deviations take the form of a physical displacement of the pits and hills along the length of the trace resulting in a deviation in the physical length of the sector, so that even two master discs with identical binary information and produced on the same machine from the same gold master are different. This displacement can be especially pronounced in certain portions of the master disc, particularly at its outer edge due to error accumulation.

[0027] Therefore, since a direct relationship exists between a sector's reading time and its physical length, the invention collects reading time data to measure differences in sector lengths.

[0028] In an embodiment of the present invention, cache buffer memory size is determined from a cache size algorithm 42, shown in Table 1. The cache size algorithm 42 measures cache buffer memory size in relative single sector

units. Cache buffer memory is contained in a memory chip installed on the logic board and serves as a storage area for data ready to be sent to the computer's microprocessor.

Table 1

CACHE\_SIZE=100;

```

ReadSector(0,1,NULL);
ReadSector(0,1,&time);
cachetime=time;
for(i=CACHE_SIZE;i>0;i-=2)
{
    ReadSector(0,i,NULL);
    ReadSector(0,1,&time);
    if (time<2*cachetime)break;
}
//Total cache size
cachesize=i;

```

[0029] Since the buffer would alter the reading time results if reading time data were allowed to run through it, while reading the cache buffer memory is filled with blank data to allow reading time data to bypass it to provide a direct "flow-through" of information enabling reading time measurement in real time.

[0030] As well, since higher speeds tend to result in more errors, drives employ reading speed reduction to help reduce reading errors. Since parameters differ between drives, to compensate for altered results that may occur due to differing drive parameters, a reading speed reduction parameter algorithm is employed in the reading speed reduction parameters determination step 26 to determine the drive's reading speed reduction parameters.

[0031] In the data collection step 20 a "reading time algorithm" is employed for populating a "reading time array" 44, shown in Figure 3, with sector reading time data. The reading time array includes a sector number column 46 and a reading time column 48.

[0032] Since authentication accuracy is directly proportional to the quantity of sectors tested, the more sectors that are tested the more accurate the result, in compromising between speed and accuracy, it has been found through experimentation that an appropriate quantity of test sectors is at least about 1000, translating into roughly 50 turns or "ways", a way being defined as one complete turn of the trace.

[0033] In the data collection step 20, a "base sector" is designated and reading time measurements are taken from the base sector to each subsequent test sector in sequence towards the disc center. Reading time is defined as the sum of two time elements; the time it takes for the head to move from the base sector to a sequential sector and the time it takes to read the sequential sector. For example, as shown in Figure 4, a disc having a base sector designated as Sector 18 or S18 would have a reading sequence of S18,S17; S18,S16; S18,S15 S18,S01.

[0034] As shown in Figure 5, the graphed raw data from the reading time array appears as a zigzagged line, the F-axis representing reading times and the Z axis representing sector numbers. The line contains erratic peak-anomalies or "leaps" 50 that appear on the right-hand slopes of the line reflecting sector-reading errors caused by factors such as disc damage.

[0035] To improve accuracy, the data is filtered to compensate for these factors using a filtering algorithm 52 shown in Table 2. The algorithm removes anomalies between the upper and lower ends of the right hand slopes of the line so that it no longer containing leaps as shown in Figure 6.

Table 2

---

 $Y_{i-1} < Y_i > Y_{i+1}$ ; where  $Y_{i-1} > Y_{i+1}$ 

```
for(i=1; i<SEEK_SECTOR-1; i++)
```

```
{
```

```
if(time[i-1]<time[i]&&time[i+1]<time[i-1])time[i]=(time[i-1]+time[i+1])/2;
```

```
}
```

where:

i is used for tracking the data

Yi represents the raw data

---

[0036] Once the data has been filtered, individual ways are discerned by determining a common slope for the majority of peaks employing a common slope algorithm 54 shown in Table 3.

Table 3

---

```
double k=0;
```

```
int count=0;
```

```
for(i=0; i<SEEK_SECTOR-1; i++)
```

```
{
```

```
if(time[i+1]<time[i])
```

```
{
```

```
k+=time[i+1]-time[i];
```

```
count++;
```

```
}
```

```
}
```

```
k=k/count;
```

where:

k represents the slope of the curve

---

[0037] Employing a matching slope algorithm 58 shown in Table 4, the reading time fields 56 of the reading time array 44 are parsed to identify slopes matching the determined common slope 46 to ascertain individual ways.

Table 4

---

```

for(i=0; i<SEEK_SECTOR-2; i++)
{
    double pp=(time[i+2]-time[i])/2;
    if(fabs(1-pp/k)>0.2)continue;
    for(j=i+3; j<SEEK_SECTOR; j++)
    {
        if(time[j]<time[j+1])break;
        double pz=(time[j]-time[i])/(j-i);
        if(fabs(1-pz/k)>0.2)break;
        pp=pz;
    }
    //forming the line equation
    line.k=pp;
    line.b=-pp*i+time[i];
    i=j;
    //adding a line to the base of lines
    Add(line);
}

```

where:  
i represents raw data

---



---

j is for tracking the sequence of the data

---

[0038] The data stored in the reading time array 44 is then utilized for measuring the quantity of sectors in each way employing a sector quantity algorithm 60 shown in Table 5,

Table 5

---

```

startsector = START_SECTOR //0x40000
for(int i=0; i<1000; i++)
{
    ReadSector(startsector, 1, buffer, tmp);
    ReadSector(startsector+1, 1, buffer, time[i]);
}

```

where:  
i represents raw data

---

[0039] As shown in Figure 7, measured sector quantity data is stored in a sector quantity array 62, which includes

a way number column 64 and a sector quantity column 66. The sector quantity array 62 is used for establishing a pattern or "fingerprint" for the disc. To determine a target disc's authenticity, its fingerprint is compared to a fingerprint of an original disc provided in the form of a CD-Key.

[0040] To allow for differences that occur in duplicates due to wear and tear on stampers during the printing process, the optimal permissible percentage differentiation between disc fingerprints was established during experimentation to be less than or equal to about 30 percent. This "threshold value" provides a compromise between allowing for stamper wear and tear and detecting as many illegally copied discs as possible.

[0041] Therefore, taking into consideration the threshold value of 30 percent, the target disc should be considered to be an original disc if the percentage of coincidence is established to be greater than or equal to about 70 percent. Conversely, the target disc should be considered to be a counterfeit copy if the percentage of coincidence is established to be less than about 70 percent.

[0042] The invention uses a standard CD-ROM drive to exploit the deviations that occur due to differences between drives when discs are illegally copied.

[0043] In addition to regular CDs, the invention can be implemented for CD-Recordable (CD-R) discs since CD-Rs are pre-marked with empty sectors to enable proper synchronization of data during the final recording stage.

[0044] CD-R discs are made in batches produced from the same master, therefore having the same geometric structure. The mastering process determines the structure of a CD-R in the same manner as regular CDs, predetermining the physical length of sectors even though product data has not yet been recorded so that even if data is burned onto separate CD-R discs using different equipment, as long as the discs are from the same batch, the differences that would typically exist either would not be detected using a standard drive or would not reach the 30% threshold.

[0045] In an embodiment of the present invention, to protect a non-recordable optical disc using the authentication method, a CD publisher provides core data locally and connects remotely to a "protection" website to run a remote copy of a protection program on the publisher's computer. The "core" data is encrypted and a protective "shell" added surrounding the core data. CD's are then made and a fingerprint is provided in the form of a CD-Key that is called by the shell during authentication.

[0046] In an embodiment of the present invention, to protect a recordable optical disc using the authentication method, a CD publisher provides core data locally and connects remotely to the protection website to run a remote copy of the protection program on the publisher's computer. A fingerprint is determined for the disc and provided to the publisher in the form of a CD-Key. The publisher then stores the disc and the provided CD-Key with other CD-Rs from the same batch for later use. When the publisher requires copies, they re-connect to the protection website to have the data encrypted and a protective shell added to the core data.

[0047] In an embodiment of the present invention, the core data is encrypted and the shell added in the same session as performing the fingerprinting. The publisher can then burn customer-ordered copies onto recordable discs from the same batch when needed, providing the CD-Key with the disc delivered to the customer.

[0048] Prior art disc protection methods entail slow and laborious steps employing expensive, high-precision equipment. The invention can provide a disc fingerprint using common, everyday equipment such as a CD-ROM drive-equipped personal computer.

[0049] As well, because the difference between disc formats lies in the data within the sectors and not in the way sectors are written to the disc, the invention provides a format-insensitive method of optical disc authentication.

[0050] In an embodiment of the present invention, the pre-defined location of ways is the outside edge of the trace to increase accuracy since differences are larger in this location due to error accumulation.

[0051] Although the present invention has been described in considerable detail with reference to certain preferred embodiments thereof, other versions are possible. Therefore, the spirit and scope of the appended claims should not be limited to the description of the preferred embodiments contained herein.

## Claims

1. An optical disc authentication method, each disc having a plurality of ways and a plurality of sectors in each way, the method comprising the steps of:

- (i) measuring the quantity of sectors in each of a defined quantity of ways to provide a disc fingerprint comprising way sector quantity values for an original disc and a target disc; and
- (ii) authenticating the target disc by:

- a) comparing the target disc fingerprint to the original disc fingerprint to determine a percentage of coinciding way sector quantity values; and
- b) classifying the target disc according to whether its determined percentage value is above or below a

pre-defined percentage threshold value, wherein a target disc having a determined percentage value of greater than or equal to the threshold value is classified as an original disc, and a target disc having a determined percentage value of less than the threshold value is classified as an illegally copied disc.

2. The method according to claim 1, the measuring step includes the steps of:

- (i) determining optical disc drive characteristics;
- (ii) collecting sector reading time data; and
- (iii) processing the collected data to provide way sector quantity values.

3. The method according to claim 2, wherein the optical disc drive characteristics are determined by:

- (i) determining cache buffer memory size of the disc drive; and
- (ii) determining reading speed reduction parameters of the disc drive.

4. The method according to claim 2, wherein the sector reading time data is collected by:

- (i) filling the cache buffer with blank data; and
- (ii) collecting reading time data in a reading time array from a defined quantity and location of ways on a disc.

5. The method according to claim 2, wherein the collected data is processed by:

- (i) filtering the data to compensate for reading errors;
- (ii) determining a common slope from the filtered data; and
- (iii) identifying slopes matching the determined common slope to ascertain individual ways for the measurement of way sector quantity values.

6. The method according to claim 1, wherein the original disc fingerprint is provided in the form of a CD-Key.

7. The method according to claim 4, wherein the defined location of ways is the outside edge of the trace to increase accuracy.

8. The method according to claim 7, wherein a file is added to product data, and the file is of sufficient size to ensure disc fingerprinting is performed at the outside edge of the disc to increase accuracy.

9. The method according to claim 8, wherein the file is empty.

10. The method according to claim 1, wherein the pre-defined percentage threshold value is about 70.

11. The method according to claim 1, wherein the defined quantity of ways tested is at least about 50.

12. The method according to claim 1, wherein product data is encrypted.

13. The method according to claim 1, wherein a protective shell is added to product data that requests a correct CD-Key to unlock the shell for access to the product data.

14. The method according to claim 1, wherein one or more steps are performed remotely.

15. The method according to claim 1, wherein a recordable disc is used.

16. The method according to claim 15, wherein the recordable disc is blank to limit the process to disc fingerprinting, enabling adding of product data at a later time.

17. An optical disc authentication apparatus, each disc having a plurality of ways and a plurality of sectors in each way, the apparatus comprising:

means for measuring the quantity of sectors in each of a defined quantity of ways to provide a disc fingerprint comprising way sector quantity values for an original disc and a target disc; and



means for authenticating the target disc including:

means for comparing the target disc fingerprint to the original disc fingerprint to determine a percentage of coinciding way sector quantity values; and  
 means for classifying the target disc according to whether its determined percentage value is above or below a pre-defined percentage threshold value, wherein a target disc having a determined percentage value of greater than or equal to the threshold value is classified as an original disc, and a target disc having a determined percentage value of less than the threshold value is classified as an illegally copied disc.

18. The apparatus according to claim 17, wherein the measuring means includes:

means for determining optical disc drive characteristics;  
 means for collecting sector reading time data; and  
 means for processing the collected data to provide way sector quantity values.

19. The apparatus according to claim 18, wherein the optical disc drive characteristics are determined by:

means for determining cache buffer memory size of the disc drive; and  
 means for determining reading speed reduction parameters of the disc drive.

20. The apparatus according to claim 18, wherein the sector reading time data is collected by:

means for filling the cache buffer with blank data; and  
 means for collecting reading time data in a reading time array from a defined quantity and location of ways on a disc.

21. The apparatus according to claim 18, wherein the collected data is processed by:

means for filtering the data to compensate for reading errors;  
 means for determining a common slope from the filtered data; and  
 means for identifying slopes matching the determined common slope to ascertain individual ways for the measurement of way sector quantity values.

22. The apparatus according to claim 17, wherein the original disc fingerprint is provided in the form of a CD-Key.

23. The apparatus according to claim 20, wherein the defined location of ways is the outside edge of the trace to increase accuracy.

24. The apparatus according to claim 23, wherein a file is added to product data, and the file is of sufficient size to ensure disc fingerprinting is performed at the outside edge of the disc to increase accuracy.

25. The apparatus according to claim 24, wherein the file is empty.

26. The apparatus according to claim 17, wherein the pre-defined percentage threshold value is about 70.

27. The apparatus according to claim 17, wherein the determined quantity of ways tested is at least about 50.

28. The apparatus according to claim 17, wherein product data is encrypted.

29. The apparatus according to claim 17, wherein a protective shell is added to product data that requests a correct CD-Key to unlock the shell for access to the product data.

30. The apparatus according to claim 17, wherein one or more elements are performed remotely.

31. The apparatus according to claim 17, wherein a recordable disc is used.

32. The apparatus according to claim 31, wherein the recordable disc is blank to limit the process to disc fingerprinting,

enabling adding of product data at a later time.

33. A storage medium readable by a computer encoding a computer process to provide an optical disc authentication method, each disc having a plurality of ways and a plurality of sectors in each way, the computer process comprising:

a processing portion for measuring the quantity of sectors in each of a defined quantity of ways to provide a disc fingerprint comprising way sector quantity values for an original disc and a target disc; and  
a processing portion for authenticating the target disc including:

a processing portion for comparing the target disc fingerprint to the original disc fingerprint to determine a percentage of coinciding way sector quantity values; and  
a processing portion for classifying the target disc according to whether its determined percentage value is above or below a pre-defined percentage threshold value, wherein a target disc having a determined percentage value of greater than or equal to the threshold value is classified as an original disc, and a target disc having a determined percentage value of less than the threshold value is classified as an illegally copied disc.

34. The method according to claim 33, wherein the measuring processing portion includes:

a processing portion for determining optical disc drive characteristics;  
a processing portion for collecting sector reading time data; and  
a processing portion for processing the collected data to provide way sector quantity values.

35. The method according to claim 34, wherein the optical disc drive characteristics are determined by:

a processing portion for determining cache buffer memory size of the disc drive; and  
a processing portion for determining reading speed reduction parameters of the disc drive.

36. The method according to claim 34, wherein the sector reading time data is collected by:

a processing portion for filling the cache buffer with blank data; and  
a processing portion for collecting reading time data in a reading time array from a defined quantity and location of ways on a disc.

37. The method according to claim 34, wherein the collected data is processed by:

a processing portion for filtering the data to compensate for reading errors;  
a processing portion for determining a common slope from the filtered data; and  
a processing portion for identifying slopes matching the determined common slope to ascertain individual ways for the measurement of way sector quantity values.

38. The method according to claim 33, wherein the original disc fingerprint is provided in the form of a CD-Key.

39. The method according to claim 36, wherein the defined location of ways is the outside edge of the trace to increase accuracy.

40. The method according to claim 39, wherein a file is added to product data, and the file of sufficient size to ensure disc fingerprinting is performed at the outside edge of the disc to increase accuracy.

41. The method according to claim 40, wherein the file is empty.

42. The method according to claim 33, wherein the pre-defined percentage threshold value is about 70.

43. The method according to claim 33, wherein the determined quantity of ways tested is at least about 50.

44. The method according to claim 33, wherein product data is encrypted.

**EP 1 195 761 A2**

45. The method according to claim 33, wherein a protective shell is added to product data that requests a correct CD-Key to unlock the shell for access to the product data.

46. The method according to claim 33, wherein one or more steps are performed remotely.

47. The method according to claim 33, wherein a recordable disc is used.

48. The method according to claim 47, wherein the recordable disc is blank to limit the process to disc fingerprinting, enabling adding of product data at a later time.

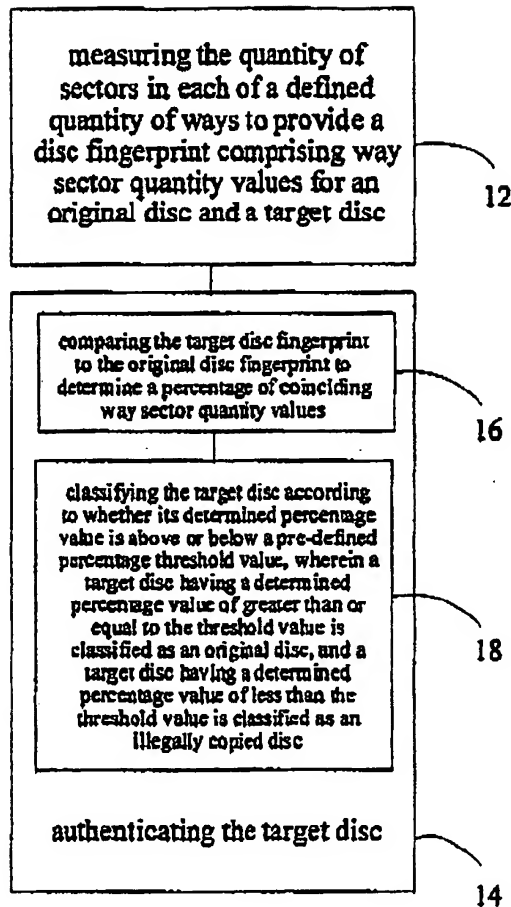


Figure 1a

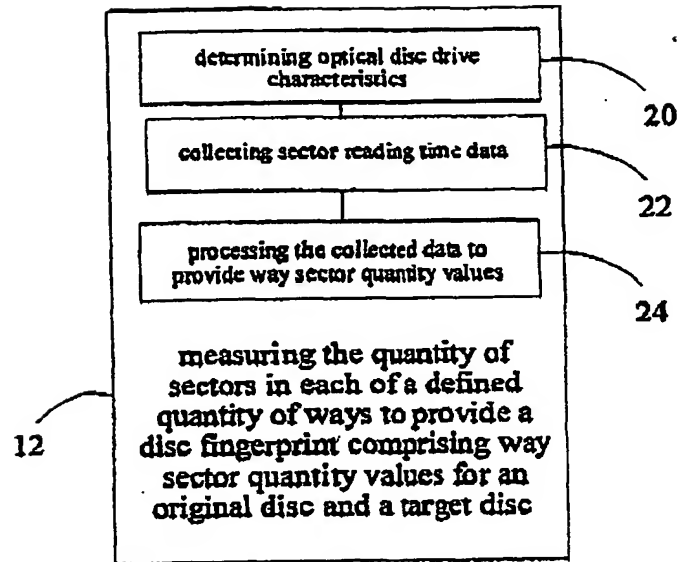


Figure 1b

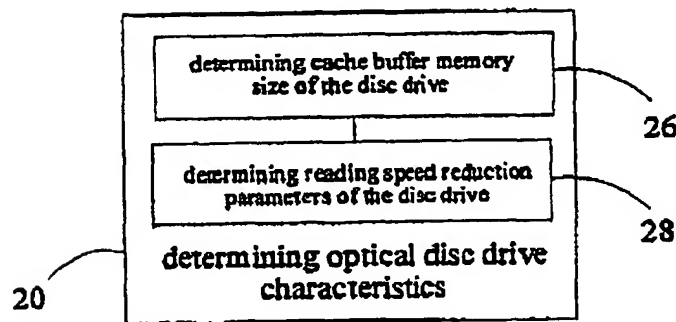


Figure 1c

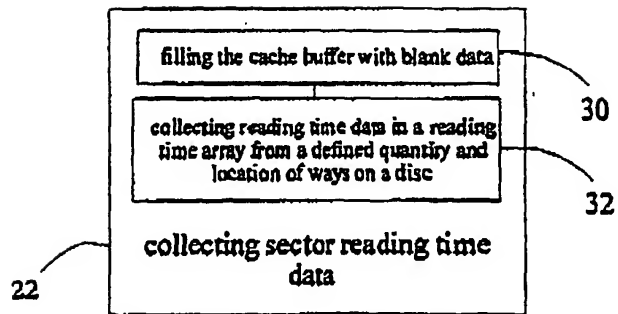


Figure 1d

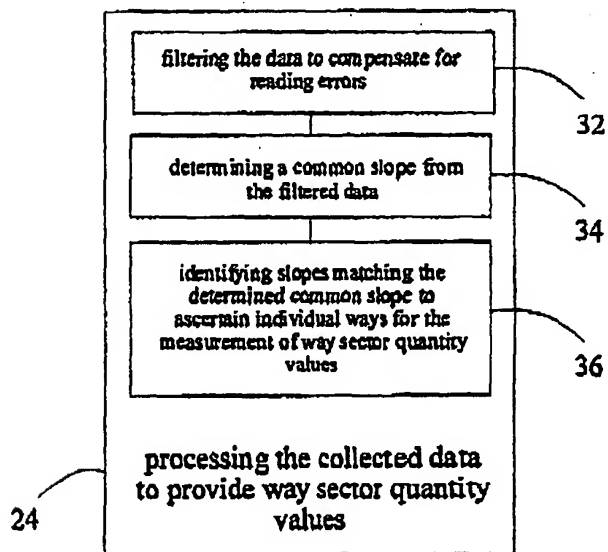


Figure 1e


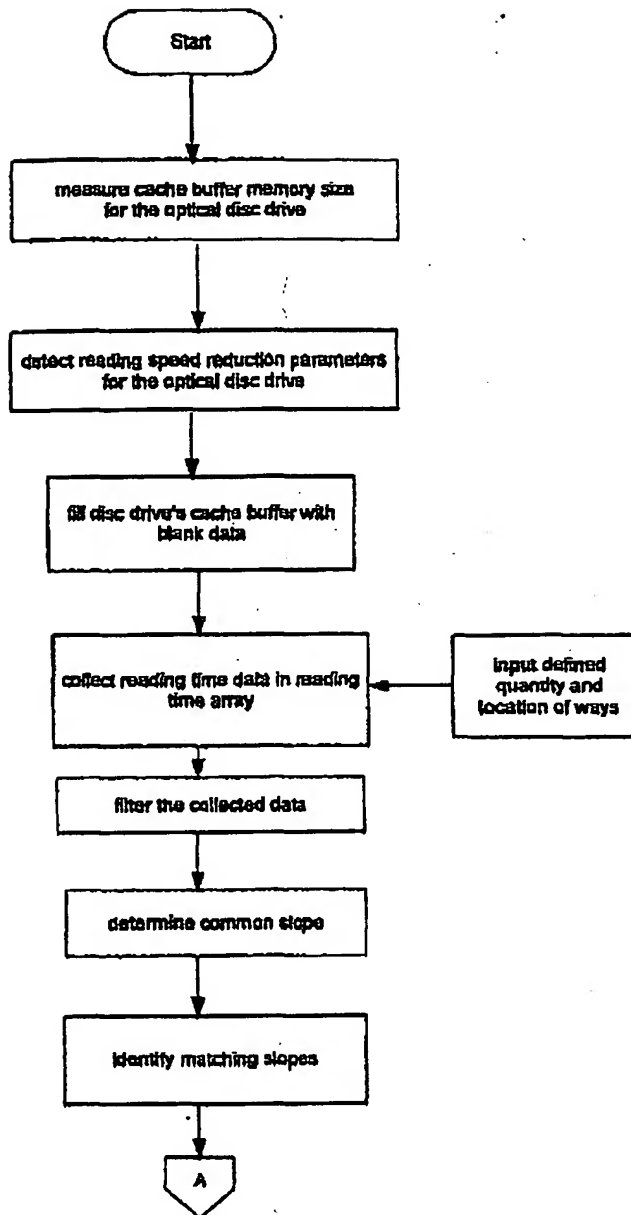


Figure 2a



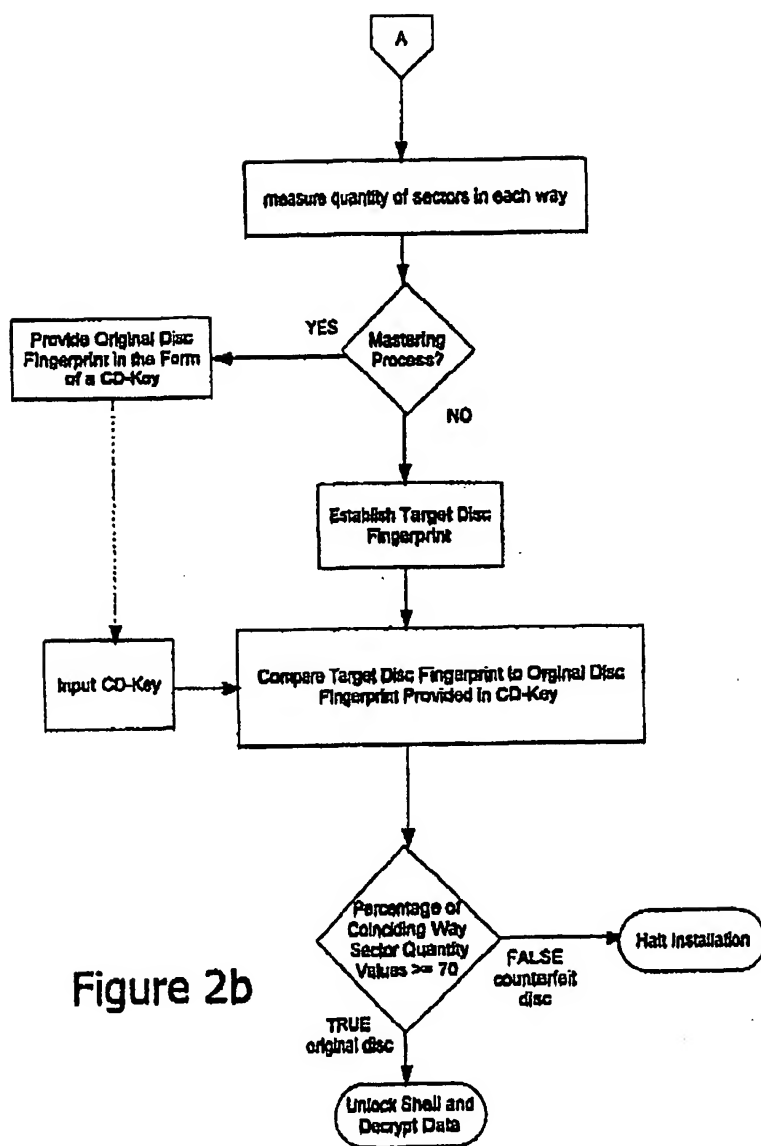

Sector No. Column	Reading Time Column
$S_0$	$T_0$
$S_1$	$T_1$
$S_2$	$T_2$
$S_3$	$T_3$
...	...
$S_n$	$T_n$

Figure 3

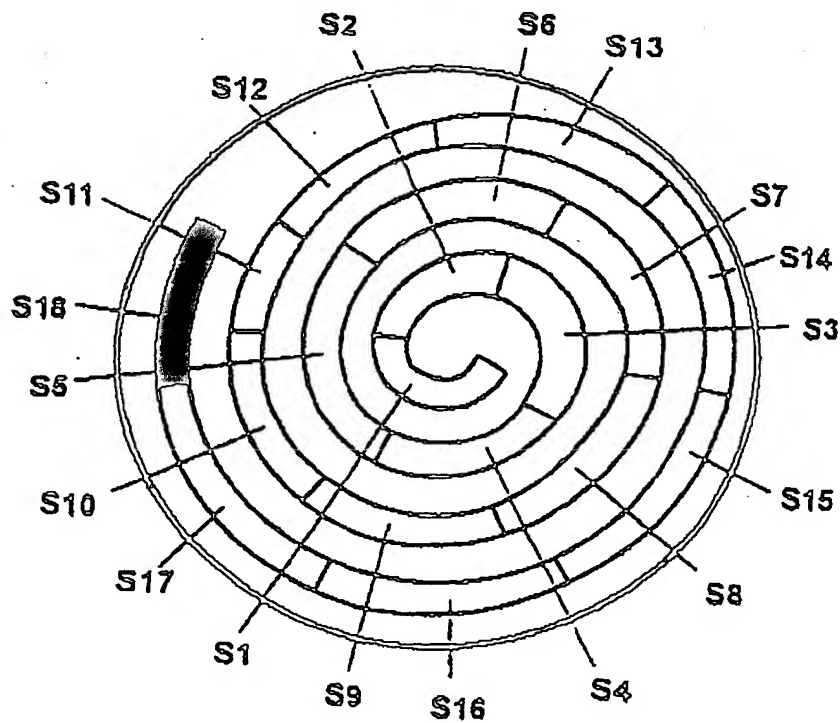


Figure 4

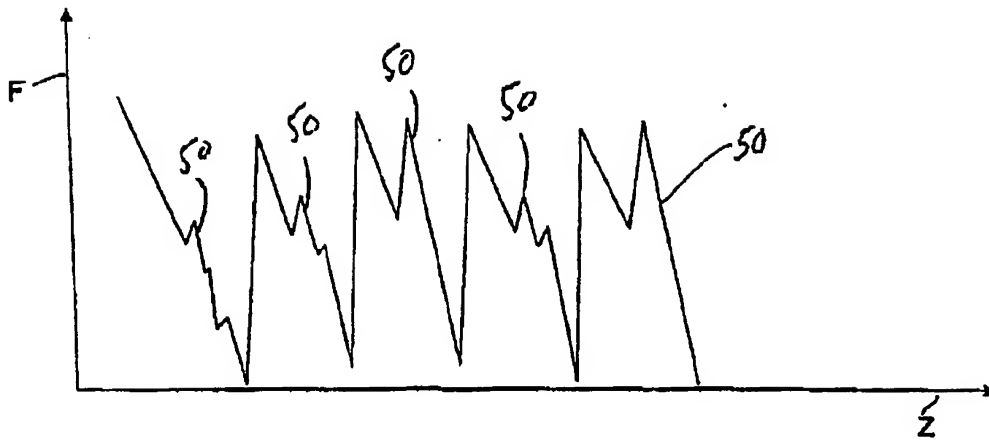


Figure 5


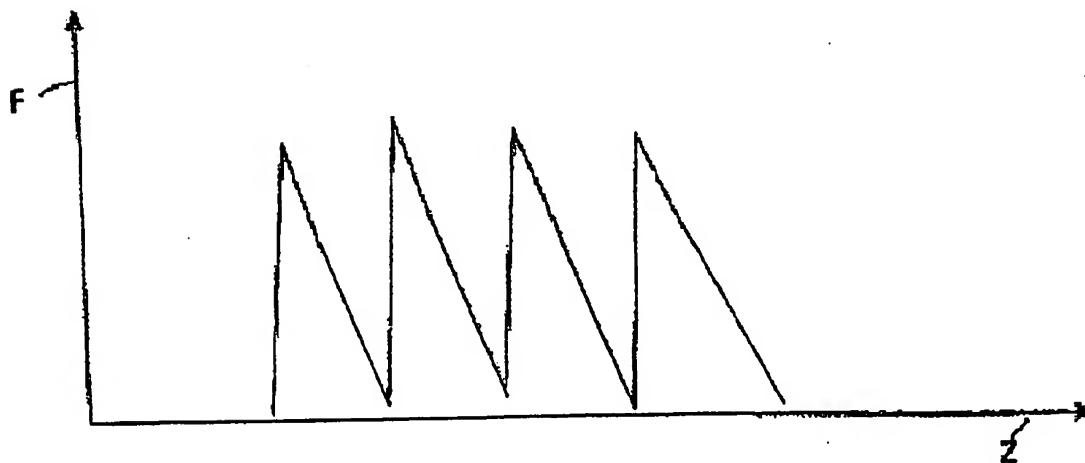


Figure 6

64 Way Number	62 Sector Quantity	66
$Y_0$	$Q_0$	
$Y_1$	$Q_1$	
$Y_2$	$Q_2$	
$Y_3$	$Q_3$	
...	...	
$Y_{30}$	$Q_{30}$	

Figure 7

**THIS PAGE BLANK (USPTO)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 195 761 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
17.04.2002 Bulletin 2002/16

(51) Int Cl.7: G11B 20/00

(43) Date of publication A2:  
10.04.2002 Bulletin 2002/15

(21) Application number: 01307452.1

(22) Date of filing: 31.08.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Saliyahov, Oleg  
Moscow (RU)

(74) Representative: Gold, Tibor Z. et al  
Kilburn & Strode  
20 Red Lion Street  
London WC1R 4PJ (GB)

(30) Priority: 01.09.2000 CA 2318310

(71) Applicant: Saliyahov, Oleg  
Moscow (RU)

### (54) Optical disc authentication method and apparatus

(57) The present invention relates to an optical disc authentication method and apparatus. The method, wherein each disc has a plurality of tracks and a plurality of sectors in each track, includes the steps of measuring the quantity of sectors in each of a defined quantity of tracks to provide a disc fingerprint comprising way sector quantity values for an original disc and a target disc and authenticating the target disc. The step of authenticating the target disc includes the steps of comparing the target disc fingerprint to the original disc fingerprint to determine a percentage of coinciding way sector quantity values and classifying the target disc according to whether its determined percentage value is above or below a pre-defined percentage threshold value, wherein a target disc having a determined percentage value of greater than or equal to the threshold value is classified as an original disc, and a target disc having a determined percentage value of less than the threshold value is classified as an illegally copied disc.

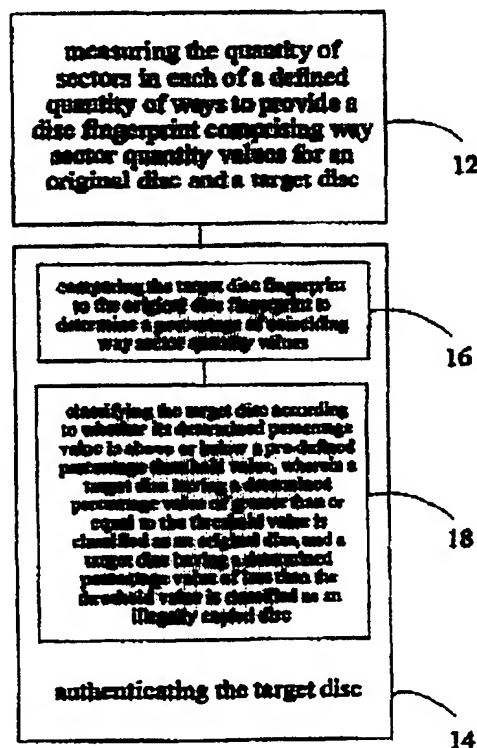


Figure 1a

EP 1 195 761 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 7452

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 644 474 A (UNIV SINGAPORE) 22 March 1995 (1995-03-22)  * abstract * * page 1, line 13 - line 15 * * page 4, line 19 - line 42 * * page 5, line 43 - line 52 *	1,2,6, 12,15, 17,18, 22,28, 31,33, 34,38, 44,47	611B20/00
A	WO 99 35641 A (DILLA LIMITED C ; HEYLEN RICHARD A A (GB)) 15 July 1999 (1999-07-15)  * page 2, line 1 - line 32 * * page 3, line 11 - line 12 * * page 5, line 4 - line 6 * * page 9, line 11 - line 19 * * page 15, line 21 - line 30 * * page 16, line 19 - page 17, line 33 *	1,2,10, 11, 15-18, 26,27, 31-34, 42,43, 47,48	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  611B 606F
A	WO 95 35533 A (MEGALODE CORP) 28 December 1995 (1995-12-28)		
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>15 February 2002</b>	Examiner <b>Ogor, M</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EPO FORM 1800 03.02 (Rev.01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 7452

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-02-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0644474	A	22-03-1995	US	5412718 A	02-05-1995
			DE	69412196 D1	10-09-1998
			DE	69412196 T2	08-04-1999
			EP	0644474 A1	22-03-1995
			SG	46304 A1	20-02-1998
WO 9935641	A	15-07-1999	AU	1773499 A	26-07-1999
			CN	1284196 T	14-02-2001
			EP	1044449 A1	18-10-2000
			GB	2347781 A	13-09-2000
			WO	9935641 A1	15-07-1999
WO 9535533	A	28-12-1995	AU	2666595 A	15-01-1996
			WO	9535533 A1	28-12-1995

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**